



DD07 and DD10 Vandal Dome Cameras

Quick Start Guide

The Eagle Eye DD07 is a 4 Megapixel vandal dome camera. The Eagle Eye DD10 is an 8 Megapixel vandal dome camera. These models are suitable for indoor and outdoor use for a wide range of applications. The cameras are preconfigured to operate securely with Brivo Eagle Eye Video and Brivo Eagle Eye CameraManager. Follow the instructions in this guide to correctly install the camera and add it to Brivo Eagle Eye Video.


1 Check the Package Contents

Open the package and check the product for obvious damage. Confirm that all items in the packing list are included in the box.

PACKING LIST


- DD07 or DD10 Camera
- Mounting Accessories Package
- Card with QR link to this Quick Start
- Guide Installation Template Sticker

The DD07 and DD10 dimensions are below in millimeters.

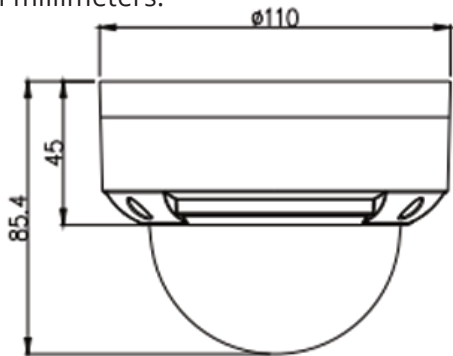


2 Remove the Dome Cover

Use the T10 screwdriver in the accessory package to remove the three screws on the dome cover.



3 Prepare the Installation Site

Attach the hole-pattern template sticker to the wall or ceiling where you want to install the camera. Drill three holes in the wall or ceiling as indicated on the sticker, and then remove the template. Use the included screws or drywall inserts (if needed) to mount the camera. As shown below.




If using additional mounting hardware (a backbox or pendant cap and wall arm), prepare and mount the hardware to the surface.

Note: If installing the camera outdoors, use weatherproof grommets (included in the accessory package).


4 Install an SD Card (Camera Direct)

If you are using Camera Direct, install an SD card in the SD card slot on the back of the camera.

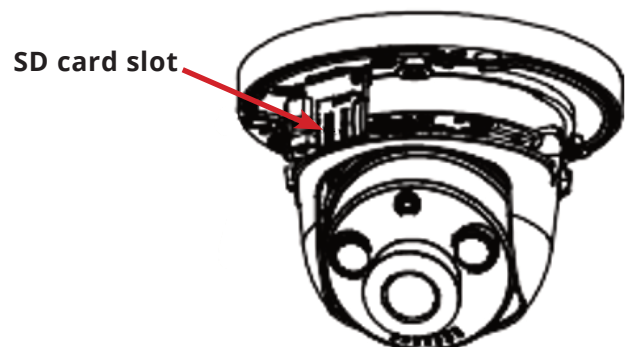

5 Connect the Camera to a Power Supply

Attach an Ethernet cable to connect the camera to a network switch. If the switch does not provide power over Ethernet (PoE), attach 12V power to the 12V power connector.

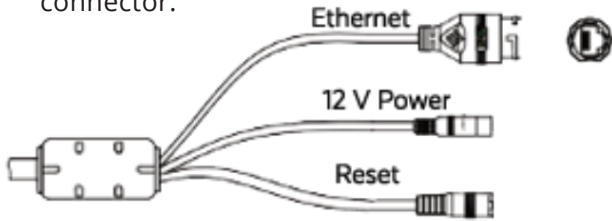

6 Attach the Camera

Align the camera with the holes in the wall or ceiling. Attach it using the included screws.



7 Add the Camera to Brivo Eagle Eye Video

We recommend using the Brivo Eagle Eye Viewer mobile application to add the camera to your Brivo Eagle Eye Videoaccount.

To add the camera through the mobile app:

- Navigate to the **Dashboard** and click the plus icon in the top right.
- To add the camera to a bridge or CMVR:
 - Select **Add Camera**.
 - Choose the camera you just connected from the list of **Available Cameras**. Select the bridge or CMVR where you want to add the camera.
 - Name the camera and choose **Save**.
- To add the camera directly to the cloud:
 - Select **Add Direct to Cloud**.
 - Name the camera.
 - Scan the QR code on the camera label to add the camera by its MAC address.
 - Select **Add Camera**.


Alternately, you can add the camera using the Brivo Eagle Eye Video web interface. To add the camera through the web interface:

- Go to the Brivo Eagle Eye Video web interface and log in with your credentials.
- Go to the **Dashboard**.
- To add the camera to a bridge or CMVR:
 - Go the list of **Available Cameras**.
 - Click the green plus icon next to the camera you just connected from the list of **Available Cameras**.
 - If there are multiple bridges or CMVRs on the account, select the bridge or CMVR where you want to add the camera.
 - Name the camera and choose **Save**.
- To add the camera directly to the cloud:
 - Select the ellipsis icon <...> and choose **Add Camera Direct** from the drop-down menu.
 - In the **Add Camera Direct** dialog, name the camera and enter its MAC address.

Note: The camera is initially shown as offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).


8 Adjust the Viewing Angle

- Go to **Layouts** in the Eagle Eye Viewer and locate the camera you just added.
- Use the **Preview** tile to check the camera's viewing angle as you adjust the lens manually.
- Loosen the side screw slightly. Adjust the camera's viewing angle by rotating the camera three ways: horizontally, vertically, and axially. The outside ring can rotate horizontally 0–355°. The outer lens can rotate vertically 0–75°. The center lens can rotate axially 360°.

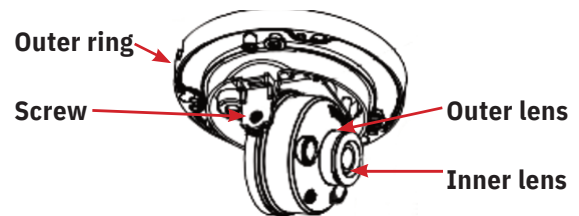

9 Replace the Dome Cover

When the desired field of view is reached, replace the dome and secure it with the T10 screwdriver.



For more information about Brivo Eagle Eye Cameras contact us at brivo.com or call us at 866.692.7486