



# Pro Turret 2 Camera

## Quick Start Guide

The Brivo Eagle Eye Pro Turret 2 is a 5 Megapixel camera with a varifocal 2.7–13.5 mm lens. It has enhanced low-light color image reproduction for superior image quality in challenging lighting conditions. This model is ideal for outdoor applications with little to no light present. Follow the instructions in this guide to correctly install the camera and add it to Brivo Eagle Eye Video.




### 1 Check the Package Contents

Open the package and check the product for obvious damage. Confirm that all items in the packing list are included in the box.

#### PACKING LIST


- Pro Turret 2 Camera
- Mounting Accessories Package
- Card with QR link to this Quick Start
- Guide Installation Template Sticker

The Pro Turret 2 dimensions are below in millimeters.

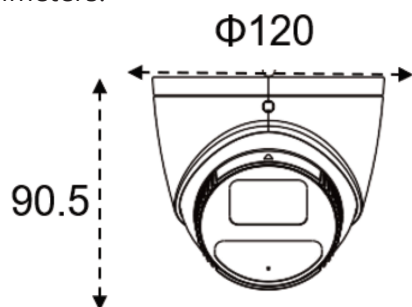


### 2 Remove the Outer Ring from the Base

Use the T10 screwdriver to remove the outer ring around the base of the camera. Set it aside temporarily.



### 3 Prepare the Installation Site


Attach the hole-pattern template sticker to the wall or ceiling where you want to install the camera. Drill three holes in the wall or ceiling as indicated on the sticker, and then remove the template. Use the included screws or drywall inserts (if needed) to mount the camera. As shown below.

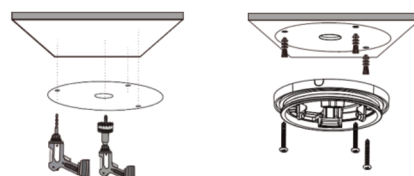

**Note:** If installing the camera outdoors, use weatherproof grommets (included in the accessory package).


### 4 Install an SD Card (Camera Direct)

If you are using Camera Direct, install an SD card in the SD slot on the back of the camera.

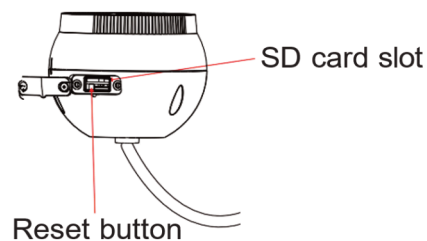

## 5 Connect the Camera to a Power Supply

Attach an Ethernet cable to connect the camera to a network switch.



## 6 Attach the Camera

Align the camera with the holes in the wall or ceiling. Attach it using the included screws.



## 7 Add the Camera to Brivo Eagle Eye Video

We recommend using the Brivo Eagle Eye Viewer mobile application to add the camera to your Brivo Eagle Eye Video account.

To add the camera through the mobile app:

- Navigate to the **Dashboard** and click the plus icon in the top right.
- To add the camera to a bridge or CMVR:
  - Select **Add Camera**.
  - Choose the camera you just connected from the list of **Available Cameras**. Select the bridge or CMVR where you want to add the camera.
  - Name the camera and choose **Save**.
- To add the camera directly to the cloud:
  - Select **Add Direct to Cloud**.
  - Name the camera.
  - Scan the QR code on the camera label to add the camera by its MAC address.
  - Select **Add Camera**.


Alternately, you can add the camera using the Brivo Eagle Eye Video web interface. To add the camera through the web interface:

- Go to the Brivo Eagle Eye Video web interface and log in with your credentials.
- Go to the **Dashboard**.
- To add the camera to a bridge or CMVR:
  - Go the list of **Available Cameras**.
  - Click the green plus icon next to the camera you just connected from the list of **Available Cameras**.
  - If there are multiple bridges or CMVRs on the account, select the bridge or CMVR where you want to add the camera.
  - Name the camera and choose **Save**.
- To add the camera directly to the cloud:
  - Select the ellipsis icon <...> and choose **Add Camera Direct** from the drop-down menu.
  - In the **Add Camera Direct** dialog, name the camera and enter its MAC address.

**Note:** The camera is initially shown as offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).

## 8 Adjust the Viewing Angle

- Go to **Layouts** in the Eagle Eye Viewer and locate the camera you just added.
- Use the **Preview** tile to check the camera's viewing angle as you adjust the lens manually.
- Adjust the camera's viewing angle by rotating the lens.
- Use the T10 screwdriver to screw the outer ring back into place.

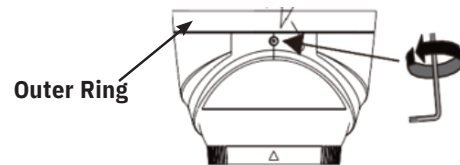

For more information about Brivo Eagle Eye Cameras contact us at [brivo.com](http://brivo.com) or call us at 866.692.7486