

7


### Installing the Solar Panel

**Note:** If the system receives fewer than four hours of sunlight at temperatures above freezing, it may need a second solar panel. If the system goes offline in cloud cover, install a second solar panel.

- Position the solar panel above the cabinet and ensure it faces due **South** with unobstructed access to sunlight. If using a compass app on a smart phone, go to the app settings and select **Use True North**.
- The solar panel bracket allows the panel to be tilted to achieve the proper vertical angle based on the site's latitude. Use an angle measure or a smart phone application.
- Use the following table to position the angle of the panel for the winter angle, which is recommended to maximize the power stored in the shorter daylight hours during winter.

| Latitude     | 25° | 30° | 35° | 40° | 45° | 50° |
|--------------|-----|-----|-----|-----|-----|-----|
| Winter Angle | 40° | 45° | 50° | 55° | 60° | 65° |

Winter Angle



8

### Powering the Solar Panel

Ensure the battery is connected before connecting the solar panel. Connect the external red and black cables to the leads on the solar panel.

**Note:** If you are using two solar panels, use a Y-connector (not included) to connect both solar panels in parallel (not series) before connecting the end of the Y-connector to the cabinet system via the keyed red and black cables.

### More Information and Troubleshooting

For more information on operation or troubleshooting tips, please contact your reseller or Brivo.

support@brivo.com



Brivo, Inc. 3001 Bee Caves Road, Suite 300, Austin, TX 78746  
Phone: +1-512-473-0500 [www.brivo.com](http://www.brivo.com)

Copyright 2026 - Brivo. All rights reserved. Use of this product and this guide is subject to license.  
20260728



### Eagle Eye SS213 Anywhere Cabinet System Quick Start Guide

Brivo Eagle Eye SS213 Anywhere Cabinet Systems are complete outdoor video surveillance systems that provide everything you need to capture and transmit video to Brivo Eagle Eye Video, even when wired power and network connections are unavailable.

You can access your video and manage your camera from any web browser or mobile device.

1

### Getting Started

**Note:** Complete steps 1-4 before mounting the system. This ensures the system is connected to Brivo Eagle Eye Video before it is mounted.

The battery is shipped partially charged. The charge is sufficient to complete these steps before connecting the solar panel. Because the battery is shipped partially charged, the system may go offline after installation until it has had a full day of sunlight to charge the battery.


**Note:** You can use a trickle charger to fully charge the battery before installation.

We recommend reading these instructions fully before starting. The system consists of the following two separately packaged items:

- Cabinet enclosure pre-assembled and configured with a 4G cellular modem, solar controller, battery, charging cable, mounting bracket, clamps, and a Brivo Eagle Eye camera.

You will also need the following:

- Power screwdriver or socket driver
- If installing on a pole, use a ladder or bucket lift

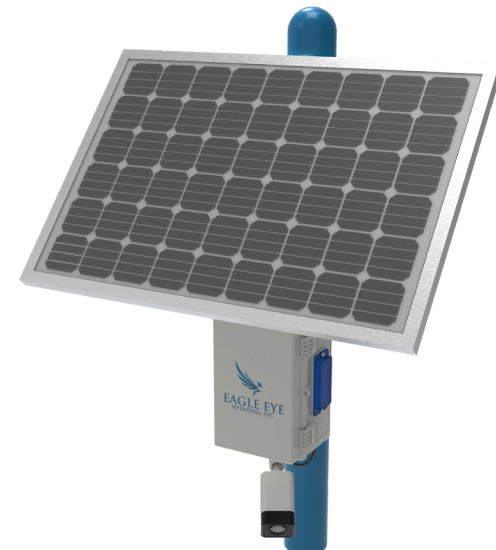

2


### Install the Battery

Install the new battery on the cabinet system and connect the terminals.

3

### Connect the Power Cables to the Battery


Open the cabinet enclosure and connect the cables with the orange plastic connectors. The correct cables have this label: 

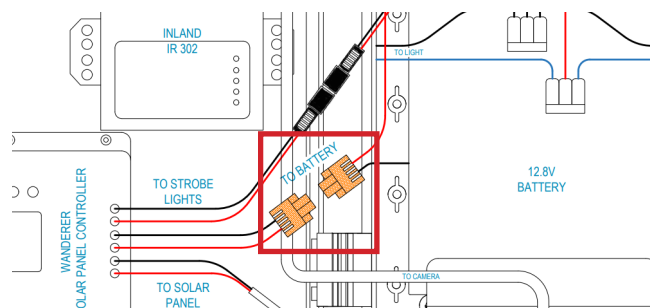

4

### Managing the Exterior Lights

The system includes blue exterior flashing lights to provide awareness and deterrence. If you prefer to disable the flashing lights, open the cabinet enclosure and disconnect the black barrel connectors that are labeled **LIGHTS** found near the hinge between the door and the case.

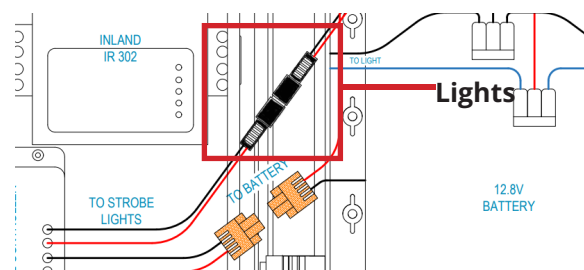

5

### Add the Camera to your Eagle Eye Cloud VMS Account

**Note:** To limit trips up a ladder or in a bucket lift, ensure the camera is connected to Brivo Eagle Eye Video before mounting the system. Use the QR code on the camera with the Brivo Eagle Eye Viewer mobile application to add the camera to your Brivo Eagle Eye Video account.

1. Open the Brivo Eagle Eye Viewer mobile app.
2. Go to the Dashboard and select the plus icon in the top right.
3. Select Add Camera.
4. Scan the QR code on the camera and add it to the account.
5. Go to Cameras and name the camera.

You can also add the camera in your web-based video account.

1. Locate the Preconfigured Device paper inside the camera enclosure, or find the MAC address on the camera label.
2. Go to Brivo Eagle Eye Video and log into your account.
3. Go to the dashboard and click the ellipsis icon <...>. Choose Add Camera Direct from the drop-down menu.
4. In the Add Camera Direct dialog, name the camera and enter its MAC address.

**Note:** The camera initially appears offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).

6

### Installing the Cabinet

**Note:** Ensure that the installation location allows the solar panel to face **South** and has unobstructed access to sunlight for maximum solar charging efficiency.

- Disconnect and remove the battery before mounting the cabinet. This makes the cabinet much lighter and easier to handle.
- Install the system above anything that might block the camera's view, and ensure it is high enough to be protected from any hazards from below.
- Remove the protective film over the lens cover.
- Adjust the camera orientation, ensuring the camera visor is above the lens.
- Mount the cabinet:
  - Thread the slotted metal straps through the metal brackets on the camera enclosure.
  - Mount the cabinet in the proper position, tighten one strap enough to hold it in position, and take the slack out of the other.
  - Make final adjustments to the position and tighten both straps. Use zip ties to attach the cables to the pole.

Replace and reconnect the battery.

**IMPORTANT:** Incorrectly connecting the battery will damage the cabinet system.