



Pro Bullet 2 Camera

Quick Start Guide

The Brivo Eagle Eye Pro Bullet 2 is a 5 Megapixel bullet camera with a varifocal 2.8–12 mm lens. The Pro Bullet 2 delivers advanced video analytics, robust construction, and enterprise-grade security features and is pre-configured to operate securely with Brivo Eagle Eye Video. Follow the instructions in this guide to correctly install the camera and add it to Brivo Eagle Eye Video.


1 Check the Package Contents

Open the package and check the product for obvious damage. Confirm that all items in the packing list are included in the box.

PACKING LIST

- Pro Bullet 2 Camera
- Mounting Accessories Package
- Card with QR link to this Quick Start Guide
- Installation Sticker

The Pro Bullet 2 dimensions are below in millimeters.

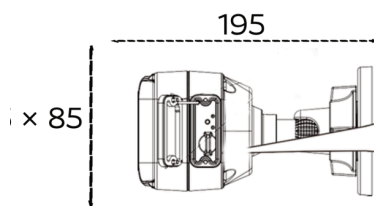


If using additional mounting hardware (a backbox or pendant cap and wall arm), prepare and mount the hardware to the surface.

Note: If installing the camera outdoors, use weatherproof grommets (included in the accessory package).


3 Install an SD Card (Camera Direct)

If you are using CameraDirect, install an SD card in the SD card slot on the bottom of the camera.

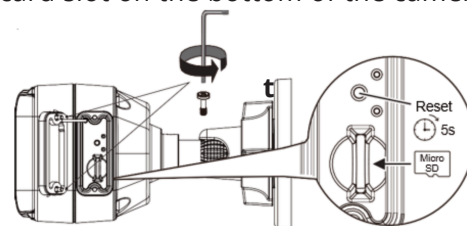


2 Prepare the Installation Site

Place the installation sticker on the wall or ceiling where you want to install the camera. Drill holes in the wall. Run the network cable through the large hole in the middle.




4 Connect the Camera to PoE

The camera is powered by PoE (Power over Ethernet). Attach an Ethernet cable to connect the camera to a network switch.

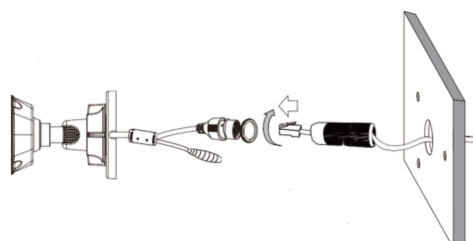

5 Attach the Camera

Mount the camera on the slot of the base using screws at the bottom of the camera. Align the installation holes at the bottom of the camera with the screw holes on the base and fix the camera on the base.

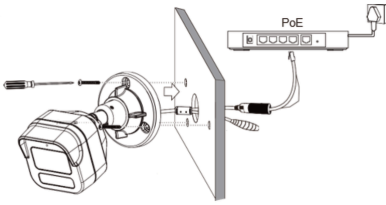

6 Add the Camera to Brivo Eagle Eye Video

We recommend using the Brivo Eagle Eye Viewer mobile application to add the camera to your Brivo Eagle Eye Video account.

To add the camera through the mobile app:

- Navigate to the **Dashboard** and click the plus icon in the top right.
- To add the camera to a bridge or CMVR:
 - Select **Add Camera**.
 - Choose the camera you just connected from the list of **Available Cameras**. Select the bridge or CMVR where you want to add the camera.
 - Name the camera and choose **Save**.
- To add the camera directly to the cloud:
 - Select **Add Direct to Cloud**.
 - Name the camera.
 - Scan the QR code on the camera label to add the camera by its MAC address.
 - Select **Add Camera**.

Alternately, you can add the camera using the Brivo Eagle Eye Video web interface. To add the camera through the web interface:


- Go to the Brivo Eagle Eye Video web interface and log in with your credentials.
- Go to the **Dashboard**.
- To add the camera to a bridge or CMVR:
 - Go the list of **Available Cameras**.
 - Click the green plus icon next to the camera you just connected from the list of **Available Cameras**.

- If there are multiple bridges or CMVRs on the account, select the bridge or CMVR where you want to add the camera.
- Name the camera and choose **Save**.
- To add the camera directly to the cloud:
 - Select the ellipsis icon <...> and choose **Add Camera Direct** from the drop-down menu. In the **Add Camera Direct** dialog, name the camera and enter its MAC address.

Note: The camera is initially shown as offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).

7 Adjust the Viewing Angle

- Go to **Layouts** in the Eagle Eye Viewer and locate the camera you just added.
 - Use the **Preview** tile to check the camera's viewing angle as you adjust the lens manually.
 - Use the included hex wrench to loosen the 3 screws on the camera base to adjust the camera view.
- When you are satisfied with the viewing angle, tighten the screws.

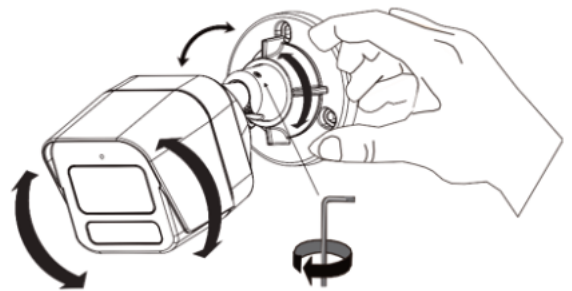

For more information about Brivo Eagle Eye Cameras contact us at brivo.com or call us at 866.692.7486