



DH02 IP Speaker

Quick Start Guide

The Brivo Eagle Eye DH02 is a flush-mount IP ceiling speaker designed for seamless integration with Brivo Eagle Eye Video. Ideal for offices, schools, healthcare facilities, and retail environments, this sleek unit features two-way audio, clear voice output, and simple PoE installation. Follow the instructions in this guide to correctly install the speaker and add it to Brivo Eagle Eye Video.




1 Check the Package Contents

Open the package and check the product for obvious damage. Confirm that all items in the packing list are included in the box.

PACKING LIST


- DH02 IP Speaker
- Mounting accessories package
- Card with QR link to this Quick Start
- Guide Installation template sticker

The DH02 dimensions are below in millimeters.

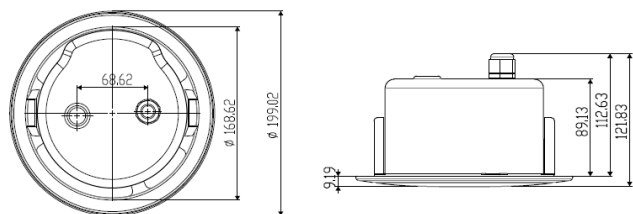


2 Attach the Speaker to a Surface

Use the included hardware to attach the speaker to a wall or ceiling.

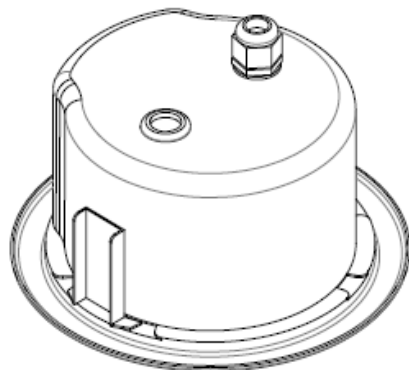

3 Connect the Speaker to a Power Supply

Attach an Ethernet cable to connect the speaker to a network switch. If the switch does not provide power over Ethernet (PoE), attach 12V power to the 12V power connector.

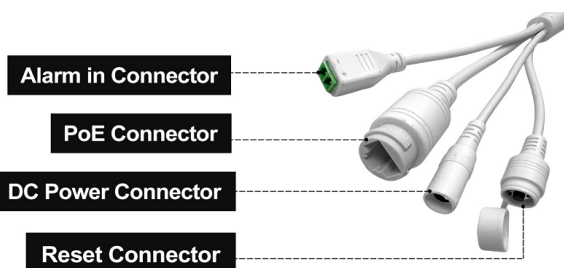

4 Add the Speaker to Brivo Eagle Eye Video

We recommend using the Brivo Eagle Eye Viewer mobile application to add the speaker to your Brivo Eagle Eye Video account. To add the speaker through the mobile app:

- Navigate to the **Dashboard** and click the plus icon in the top right.
- To add the speaker to a bridge or CMVR:
 - Select **Add Speaker**.
 - Choose the speaker you just connected from the list of **Available Speakers**. Select the bridge or CMVR where you want to add the speaker.
 - Name the speaker and choose **Save**.


Alternatively, you can add the speaker using the Brivo Eagle Eye Video web interface. To add the speaker through the web interface:

- Go to the Brivo Eagle Eye Video web interface and log in with your credentials.
- Go to the **Dashboard** and click the plus icon in the top right.
 - Click **Add Speaker**.
 - Go the list of **Available Speakers**.
 - Click the three dots icon next to the speaker you just connected from the list and choose **Add Speaker**.
 - If there are multiple bridges or CMVRs on the account, select the bridge or CMVR where you want to add the speaker.
 - Name the speaker and choose **Save**.

Note: The speaker is initially shown as offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).

5 Check the Speaker Operation

- Go to **Layouts** in the Eagle Eye Viewer and locate the speaker you just added.
- Use the **Preview** tile to check the speaker's functionality.

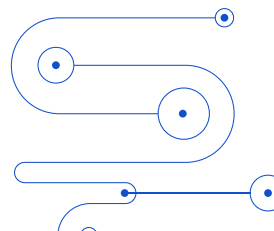

For more information about Brivo Eagle Eye hardware
contact us at brivo.com or call us at 866.692.7486