



Brivo Eagle Eye DZ06 PTZ Camera

Quick Start Guide

The Brivo Eagle Eye DZ06 is a 5 Megapixel Starlight PTZ camera. This model is suitable for indoor and outdoor use for a wide range of applications. The cameras are pre-configured to securely operate with Brivo Eagle Eye Video and Brivo Eagle Eye CameraManager. Follow the instructions in this guide to correctly install the camera and add it to the Brivo Eagle Eye AI VMS.




1 Check the Package Contents

Open the package and check the product for obvious damage. Confirm that all items in the packing list are included in the box.

Packing List


- DZ06 Camera
- Mounting Accessories Package
- Card with QR link to this Quick Start Guide
- Installation Template Sticker

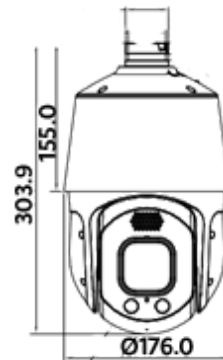

The DZ06 dimensions are in millimeters.

2 Prepare the Installation Site


Mark the wall or ceiling installation site for the bracket dimensions. Drill four holes to 60 mm depth and drive the plastic anchors into the holes.



Note: If installing the camera outdoors, use weatherproof grommets (included in the accessory package).


3 Thread the Cables

Thread the cables through cable hole on the bracket.

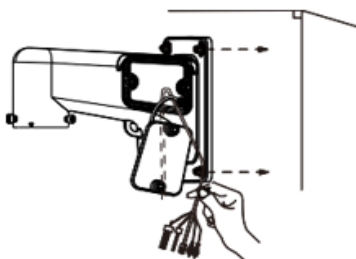

4 Attach the Camera to the Bracket


Attach the DZ06 camera to the bracket and tighten the screws.

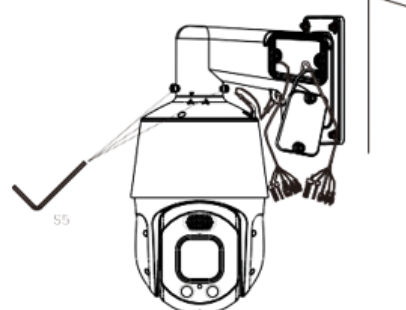

5

Connect the Camera to a Power Supply

Attach an Ethernet cable to connect the camera to a network switch. If the switch does not provide power over Ethernet (PoE), attach 12V power to the 12V power connector.

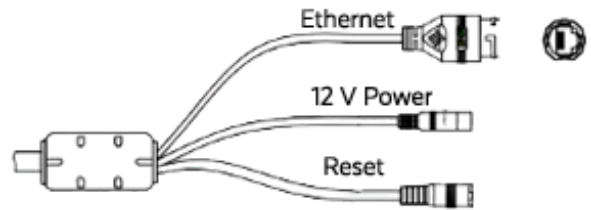

6

Add the Camera to Brivo Eagle Eye Video

We recommend using the Brivo Eagle Eye Viewer mobile application to add the camera to your Brivo Eagle Eye Video account.

To add the camera through the Brivo Eagle Eye Viewer app:

- Navigate to the Dashboard and click the plus icon in the top right.
- To add the camera to a bridge or CMVR:
 - Select Add Camera.
 - Choose the camera you just connected from the list of Available Cameras. Select the bridge or CMVR where you want to add the camera.
 - Name the camera and choose Save.
- To add the camera directly to the cloud:
 - Select Add Direct to Cloud.
 - Name the camera.
 - Scan the QR code on the camera label to add the camera by its MAC address.
 - Select Add Camera.

Alternatively, you can add the camera using the Brivo Eagle Eye Video web interface. To add the camera through the web interface:

- Go to the Brivo Eagle Eye Video web interface and log in with your credentials.
- Go to the Dashboard.
- To add the camera to a bridge or CMVR:
 - Go the list of Available Cameras.
 - Click the green plus icon next to the camera you just connected from the list of Available Cameras.
 - If there are multiple bridges or CMVRs on the account, select the bridge or CMVR where you want to add the camera.
 - Name the camera and choose Save.
- To add the camera directly to the cloud:
 - Select the ellipsis icon <...> and choose Add Camera Direct from the drop-down menu.
 - In the Add Camera Direct dialog, name the camera and enter its MAC address.



Note: The camera is initially shown as offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).

7

Adjust the Viewing Angle

- Go to Layouts in the Brivo Eagle Eye Viewer and locate the camera you just added.
- Use the Preview tile to check the camera's viewing angle as you adjust the lens manually.
- Adjust the camera's viewing angle by rotating the camera. The camera can pan 0° to 355° endlessly and tilt -20° to +90° (auto-flip).



For more information about Eagle Eye Cameras
contact us at brivo.com or call us at 866.692.7486