



Brivo Eagle Eye EC01

Encoder

Installation and Quick Start Guide

The Brivo Eagle Eye EC01 Encoder is a 16-channel HD over coax (HDoC) encoder that supports CVBS, TVI, CVI, and AHD. It has audio (RCA) and physical I/Os (16/4) with 4K local HDMI output and 2MP maximum input for HD signals. The EC01 supports the most popular versions of HDoC but requires that the cable be copper core RG59 or RG6.

1. Packing List

Component	Quantity	Remark
HD Network Video Codec	1	
Quick Start Guide	1	
Mouse	1	
Power Adapter	1	Optional
Power Cord	1	
Terminal Block	2	Optional

2. Device Structure

Note: Different devices may have different ports and multi-headed cables. Please refer to the actual product.

Figure 2-1: Rear Panel



Refer to the next table for descriptions of the rear panel parts.


Rear Panel Description

Name	Description
VIDEO IN Port	Plug in analog camera by coaxial line.
CVBS OUT	Output analog video signal.
AUDIO OUT/AUDIO IN	Audio output/Audio input.
LAN1/LAN2	RJ 45 100/1000 Mbps adaptive Ethernet interface. LAN1 is the default gateway and used for external networks. LAN2 is used for internal networks.
HDMI/ VGA	Video output interface
USB	USB 2.0 port for USB flashdrive or mouse
Alarm I/O	Alarm input/ Alarm output
	Power switch
	DC12V
	Ground

Device Dimensions

Note: Different devices may have different dimension. Please refer to the actual product. VGA interface of the encoder.

Dimensions (unit: mm)

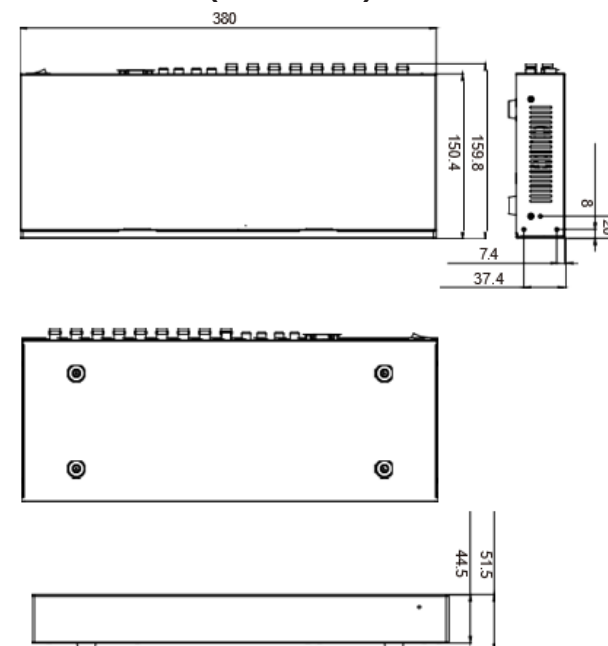

3. Device Operation

Before Starting up the Encoder

Before starting the encoder, ensure that it is properly connected to a power supply and that a monitor is connected to the HDMI or VGA interface of the encoder.

Special Functions

Some cameras have special functions. Please refer to the camera channels.

Power Off

To power off the encoder, turn off the power switch.


4. Quick Configuration

When powered on for the first time, the Encoder's wizard appears. Users can configure the system then or exit the wizard and do the configuration later.

5. Adding the Encoder to Brivo Eagle Eye Video

Follow the steps below to add the encoder to Brivo Eagle Eye Video.

1. Under **Add Cameras** on the Dashboard, click the green plus icon.

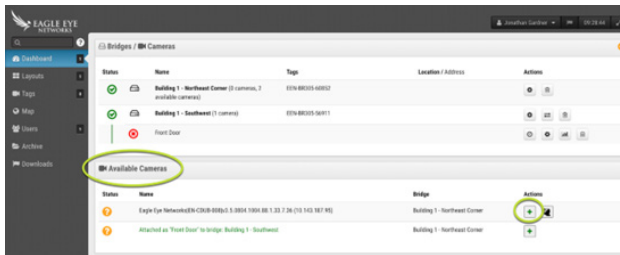

2. Once the green check mark appears beside the encoder, all 16 analog channels will be available to add in Brivo Eagle Eye Video under the **Channels** tab in camera settings.
3. Each channel corresponds to a labeled camera input on the encoder. If a channel is added to Brivo Eagle Eye Video without a camera connected to the corresponding channel, it will appear offline until a camera is connected.

6. Getting Support

Support is available 24 hours a day, 7 days a week, 365 days a year. You can email support at support@brivo.com. For immediate support, please call:

- US: +1-512-473-0501
- EMEA: +31 (0) 20 26 10 460 APAC:
- +81-3-6868-5527

