



DX02 Panoramic Camera

Quick Start Guide

The Eagle Eye DX02 is a 20 Megapixel (4 × 5 MP) 360° panoramic camera with four independently adjustable 5MP camera heads, delivering unparalleled coverage with up to four separate video streams—all through a single network cable and IP address for streamlined installation and cost efficiency. Follow the instructions in this guide to correctly install the camera and add it to Brivo Eagle Eye Cloud Video.




1 Check the Package Contents

Open the package and check the product for obvious damage. Confirm that all items in the packing list are included in the box.

PACKING LIST


- DX02 Camera
- Mounting Accessories Package
- Card with QR link to this Guide
- Installation Template Sticker

The DX02 dimensions are below in millimeters.




2 Install the Wall Arm

Drill four holes where you want to install the wall arm. Run the power and Ethernet cables from the wall outlet through the wall arm. Attach the wall arm to the wall using the included screw anchors and screws.

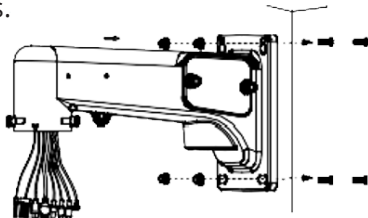


3 Remove the Camera Covers

Using the included Torx screwdriver, remove the top and bottom covers from the camera.

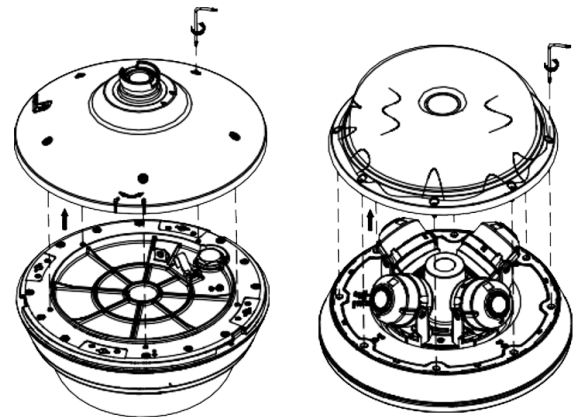


4 Connect the Top Cover to the Wall Arm

Attach the shorter safety connector to the wall arm and the top cover. Run the cables from the wall arm through the top cover. Twist the cover securely in place on the wall arm. Use the Torx screwdriver to tighten the set screw on the wall arm to secure the top cover.

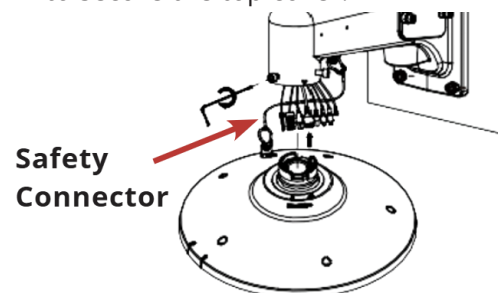


5 Secure the Camera and Attach Cables

Attach the longer safety connector to the under side of the top cover and the top of the DX02 camera. Attach the power and Ethernet cables to the camera.



6 Attach the Camera to the Top Cover

Use the lock icons on the top cover as guides and twist the camera securely in place. Tighten the set screws on the top cover using the Torx screwdriver.

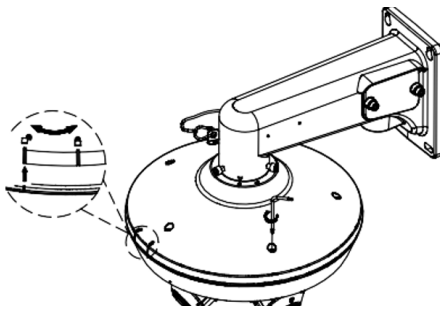

7 Add the Camera to Brivo Eagle Eye Video

We recommend using the Brivo Eagle Eye Viewer mobile application to add the camera to your Brivo Eagle Eye Video account.

To add the camera through the Brivo Eagle Eye Viewer app:

Navigate to the **Dashboard** and click the plus icon in the top right.

To add the camera to a bridge or CMVR:

- Click the green plus icon next to the camera you just connected from the list of **Available Cameras**.
- If there are multiple bridges or CMVRs on the account, select the bridge or CMVR where you want to add the camera.
- Name the camera and choose **Save**.

- Select **Add Camera**.
- Choose the camera you just connected from the list of **Available Cameras**. Select the bridge or CMVR where you want to add the camera.

To add the camera directly to the cloud:

- Select **Add Direct to Cloud**.
- Name the camera.
- Scan the QR code on the camera label to add the camera by its MAC address.
- Select **Add Camera**.

Alternately, you can add the camera using the Brivo Eagle Eye Video web interface. To add the camera through the web interface:

- Go to the **Dashboard**.

To add the camera to a bridge or CMVR:

- Go the list of **Available Cameras**.


To add the camera directly to the cloud:

- Select **+ Add Device** and choose **Add Camera Direct** from the drop-down menu. In the **Add Camera Direct** dialog, name the camera and enter its MAC address.

Note: The camera is initially shown as offline on the dashboard. After two minutes, it should appear online (denoted by a green check mark).

8 Adjust the Viewing Angle and Replace the Bottom Cover

- Go to **Layouts** in the Brivo Eagle Eye Viewer and locate the camera you just added.
- Use the **Preview** tile to check the camera's viewing angle as you adjust the lens manually.
- You can move each of the four cameras back and forth or rotate each lens.
- Use the Torx screwdriver to secure the bottom cover over the cameras.

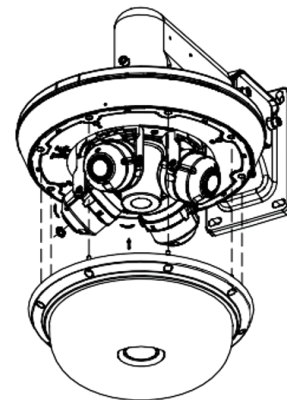

For more information about Brivo Eagle Eye Cameras contact us at brivo.com or call us at 866.692.7486